


Basic SA308

The American Sensors SA308 smoke alarm is a general purpose, 9 volt battery operated alarm incorporating reliable "dual-ionization" technology for sensing visible and/or invisible combustible particles. This unit is suitable for installation in any room of the residence.

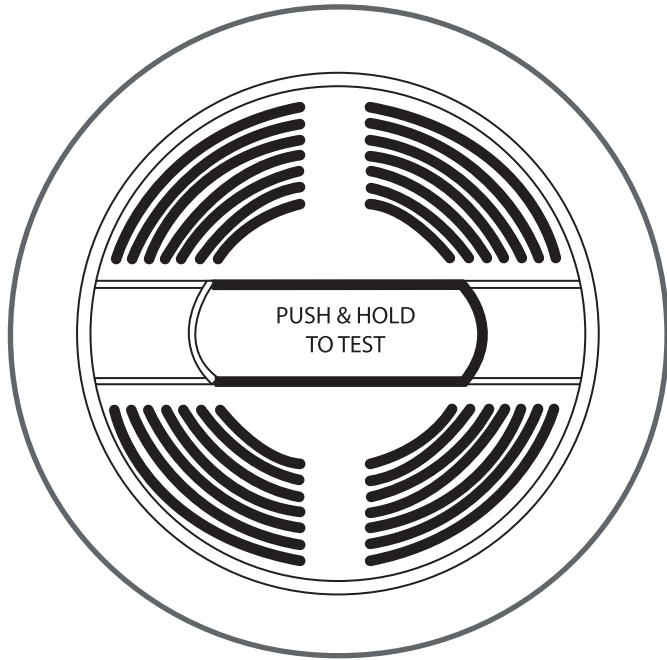

Item Order Number: SAAU-308A (U.S.A.)
Master Carton Quantity of 10

TECHNICAL SPECIFICATIONS

Battery Life: At least one year under normal conditions

Low Battery Signal: Up to 30 days

Alarm Sound Level: 85 dB at 10 feet (3 m)

Power Indicator Light: Solid-state LED flashes once every 45 seconds

Dimensions: 4.4" (diameter) x 1.5" (d)
11.2 cm (diameter) x 3.8 cm(d)

NORMAL OPERATING CONDITIONS

Temperature Range: 40°F (5°C) to 100°F (38°C)

Relative Humidity: 10% to 85%

FEATURES

- Battery powered
- Suitable for all rooms
- Dual-ionization technology
- Alarm and power test feature
- Operating LED
- Low battery warning
- Battery removal indicator
- 9 volt battery included
- Easy installation, mounting hardware included
- 10 Year Limited Warranty (battery excluded)
- Meets applicable standards

ADDITIONAL PRODUCTS/SMOKE ALARMS

	Ionization	Photoelectric
Basic 9 Volt Battery	SA308 (U.S.A.) SA310 (Canada)	
Alarm-Pause® Feature / 9 Volt Battery	SA320	
Emergency Light / 9 Volt Battery	SA358	
Photoelectric / 9 Volt Battery 470B-TamperResistant		SA388 (Canada) 470B (U.S.A.)
Combination Ionization/ Photoelectric- 9 Volt Battery Ion/Photoelectric - Hardwire *Hardwire w/battery back-up	SA700 (Canada) 770L *770LBX	SA700 (Canada) 770B (U.S.A.) 770L *770LBX
10 Year Long Life Lithium Battery with Alarm-Pause® *Tamper Proof Housing	SA900 *SA901	
120 Volt AC Hardwire/Basic * with 9 Volt Battery Back-up **Tamper Resistant Lithium rechargeable battery B-U	SA360 *SA379 **670LBX 670LBR	470L *470LBX
120 Volt AC Hardwire with Built-in Relay 12/24 Volt AC/DC with Built-in Relay	ESA5011 ASD100 (Canada)	470LR ASD200 (Canada)
Combination Smoke/CO 120 Volt Hardwire/Interconnect	COS2010	