


Emergency Light SA358

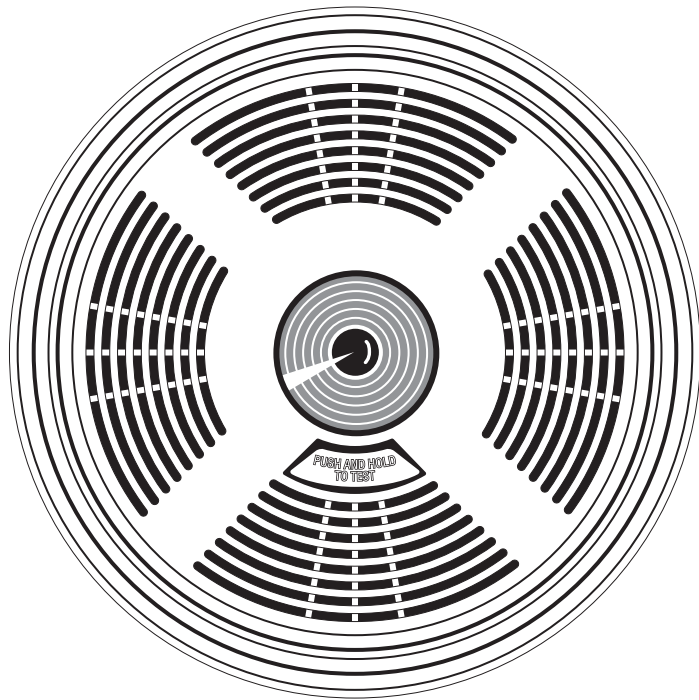

Item Order Number: SAAU-358E (U.S.A.)
SAAC-358E (Canada)
Master Case Quantity 6

TECHNICAL SPECIFICATIONS

Battery Life: At least one year under normal conditions

Low Battery Signal: Up to 30 days

Alarm Sound Level: 85 dB at 10 feet (3 m)

Indicator Light: Solid-state LED flashes once every 45 seconds

Emergency Light: 6 volt 0.5A 3.5 Candlepower

Dimensions: 6.2"(162 mm) x 1.6"(38 mm)

NORMAL OPERATING CONDITIONS

Temperature Range: 40°F (5°C) to 100°F (38°C)

Relative Humidity: 10% to 85%

The American Sensors SA358 smoke alarm with emergency light is a 9 volt battery powered device. This alarm is ideal for areas where an emergency light indicates an escape route. The suggested areas for location are hallways, stairways and exit doors.

FEATURES

- Battery Powered
- Emergency light illuminates when alarm sounds
- Ideal for hallways and stairways
- Dual-ionization technology
- Alarm and power test feature
- Operating LED
- Low battery warning
- Battery removal indicator
- 2-9 volt batteries (included)
- Easy installation, mounting hardware included
- 10 Year Limited Warranty (batteries excluded)
- Meets applicable standards

ADDITIONAL PRODUCTS/SMOKE ALARMS

	Ionization	Photoelectric
Basic 9 Volt Battery	SA308 (U.S.A.) SA310 (Canada)	
Alarm-Pause [®] Feature / 9 Volt Battery	SA320	
Emergency Light / 9 Volt Battery	SA358	
Photoelectric / 9 Volt Battery 470B-TamperResistant		SA388 (Canada) 470B (U.S.A.)
Combination Ionization/ Photoelectric- 9 Volt Battery Ion/Photoelectric - Hardwire *Hardwire w/battery back-up	SA700 (Canada) 770L *770LBX	SA700 (Canada) 770B (U.S.A.) 770L *770LBX
10 Year Long Life Lithium Battery with Alarm-Pause [®] *Tamper Proof Housing	SA900 *SA901	
120 Volt AC Hardwire/Basic * with 9 Volt Battery Back-up **Tamper Resistant Lithium rechargeable battery B-U	SA360 *SA379 **670LBX 670LBR	470L *470LBX
120 Volt AC Hardwire with Built-in Relay	ESA5011	470LR
12/24 Volt AC/DC with Built-in Relay	ASD100 (Canada)	ASD200 (Canada)
Combination Smoke/CO 120 Volt Hardwire/Interconnect	COS2010	

Dicon Global Inc.
88B East Beaver Creek Road, Unit 6
Richmond Hill, Ontario, Canada L4B 4W2
905-482-3720 Fax: 905-731-8267
info@diconglobal.com
www.diconglobal.com

**AMERICAN
SENSORS**
WE SAVE LIVES FOR A LIVING