


120 VOLT HARDWIRE

CO810

The American Sensors CO810 monitors and detects carbon monoxide gas. It measures for concentrations of CO and sounds a loud emergency alarm when a potentially harmful level is reached. The unit is easily hardwired to any standard electrical junction box for permanent installation.

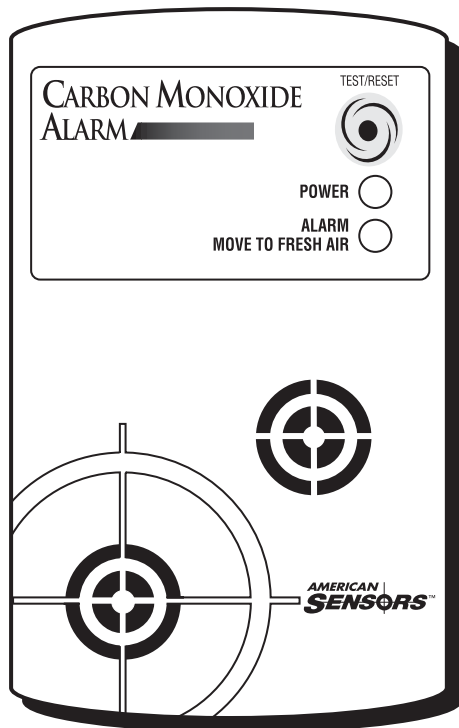

FEATURES

- Simple 2 wire installation (120 Volt AC)
- Standard and octagon mounting plates included
- No batteries or replacement sensor required
- Advanced semiconductor sensing technology
- Emergency alarm
- Instant test/reset feature
- Self diagnosing circuitry
- Power and alarm light indicators
- Loud 85 decibel alarm pattern
- 5 Year Limited Warranty
- Meets applicable standards

Item Order Number:


COAC-810C
Master case quantity of 6

TECHNICAL SPECIFICATIONS

Detection Method:	Advanced semiconductor sensing technology
Sensitivity:	Continuous monitoring as per applicable standards
Dimensions:	3"(w) x 5"(h) x 1.7"(d)
Power Supply:	120 volt AC (60 Hz, 7w)
Alarm Sound Level:	85 dB at 10 feet (3 m)
Alarm Duration:	Repeating pattern while hazardous level of CO is present

NORMAL OPERATING CONDITIONS

Temperature Range:	40°F (4.4°C) to 100°F (37.8°C)
Relative Humidity:	30% to 70%

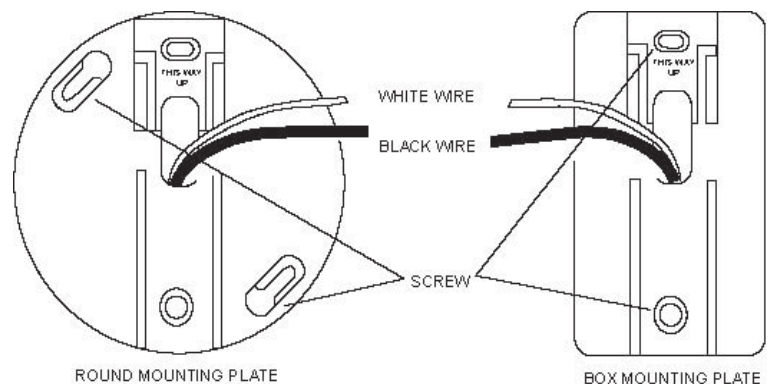

Dicon Global Inc.
88B East Beaver Creek Road, Unit 6
Richmond Hill, Ontario, Canada L4B 4W2
905-482-3720 Fax: 905-731-8267
info@diconglobal.com
www.diconglobal.com

**AMERICAN
SENSORS**
WE SAVE LIVES FOR A LIVING