




CO900

The American Sensors CO900 monitors and detects carbon monoxide gas. It measures for concentrations of CO and sounds a loud alarm when a potentially harmful level is reached. The unit is easy to install as it simply plugs into any standard 120 volt wall outlet and has a 9 volt battery back-up power source to ensure monitoring, even in the event of a power failure.

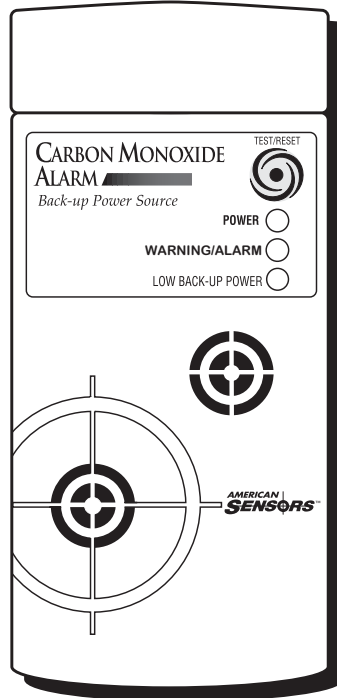

FEATURES

- 120 volt Plug-in with 9 volt battery back-up power source (included)
- Advanced semiconductor sensing technology
- No expensive replacement sensor required
- Emergency alarm
- Instant test/reset feature
- Battery removal indicator
- Low back-up power indicator
- Self diagnosing circuitry
- Power and alarm light indicators
- Loud 85 decible alarm pattern
- 5 Year Limited Warranty
- Meets applicable standards

TECHNICAL SPECIFICATIONS

Detection Method:	Advanced semiconductor sensing technology
Sensitivity:	Continuous monitoring as per applicable standards
Dimensions:	3"(w) x 6.6"(h) x 1.7"(d)
Power Supply:	120 volt AC (60 Hz, 3w) Back-up - 9 volt Alkaline
Alarm Sound Level:	85 dB at 10 feet (3 m)
Alarm Duration:	Repeating pattern while hazardous level of CO is present

NORMAL OPERATING CONDITIONS

Temperature Range:	40°F (4.4°C) to 100°F (37.8°C)
Relative Humidity:	30% to 70%

Item Order Number:

CO-900KC (Canada)
Master Case Quantity of 6

ADDITIONAL PRODUCTS/CO ALARMS

120V AC Plug in *LED Display *LED Display and battery back-up	CO800 CO910 CO920 CO851 (Ultra Series)
9 Volt Battery Portable	CO1100G (Canada only) CO850 (Ultra Series)
120 Volt AC Hardwire *Hardwire with battery back-up /interconnect *Combination Smoke/CO 120 Volt Hardwire/interconnect	CO810 CO842 (Ultra Series) COS2010

Dicon Global Inc.
88B East Beaver Creek Road, Unit 6
Richmond Hill, Ontario, Canada L4B 4W2
905-482-3720 Fax: 905-731-8267
info@diconglobal.com
www.diconglobal.com

AMERICAN SENSORS
WE SAVE LIVES FOR A LIVING